


MODEL 72

3/8" Square

Single Turn

Cermet Trimming

Potentiometer

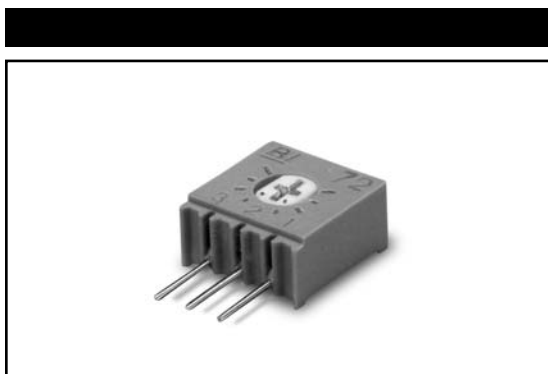

1

ELECTRICAL

Standard Resistance Range, Ohms	10 to 2Meg
Standard Resistance Tolerance	$\pm 10\%$ (<100 Ohms = $\pm 20\%$)
Input Voltage, Maximum	200 Vdc or rms not to exceed power rating
Slider Current, Maximum	100mA or within rated power, whichever is less
Power Rating, Watts	0.5 at 85°C derating to 0 at 125°C
End Resistance, Maximum	2 Ohms
Actual Electrical Travel, Nominal	244°
Dielectric Strength	900 Vrms
Insulation Resistance, Minimum	1,000 Megohms
Resolution	Essentially infinite
Contact Resistance Variation, Maximum	1% or 1 Ohm, whichever is greater

ENVIRONMENTAL

Seal	85°C Fluorinert® (No Leaks)
Temperature Coefficient, Maximum	$\pm 100\text{ppm}/^\circ\text{C}$
Operating Temperature Range	-55°C to +125°C
Thermal Shock	5 cycles, -55°C to +125°C (1% ΔRT , 1% ΔVR)
Moisture Resistance	Ten 24 hour cycles (1% ΔRT , IR 100 Megohms Min.)
Shock, 6ms Sawtooth	100G's (1% ΔRT , 1% ΔVR)
Vibration	20G's, 10 to 2,000 Hz (1% ΔRT , 1% ΔVR)
High Temperature Exposure	250 hours at 125°C (2% ΔRT , 2% ΔVR)
Rotational Life	200 cycles (3% ΔRT)
Load Life at 0.5 Watts	1,000 hours at 70°C (2% ΔRT)
Resistance to Solder Heat	260°C for 10 sec. (1% ΔRT)

MECHANICAL

Mechanical Stops	Solid
Torque, Starting Maximum	3 oz.-in. (0.021 N-m)
Weight, Nominal	.025 oz. (0.70 grams)

Fluorinert® is a registered trademark of 3M Company.
Specifications subject to change without notice.




1-55

Model 72


TOP ADJUSTMENT (Inch/mm)

Model 72P

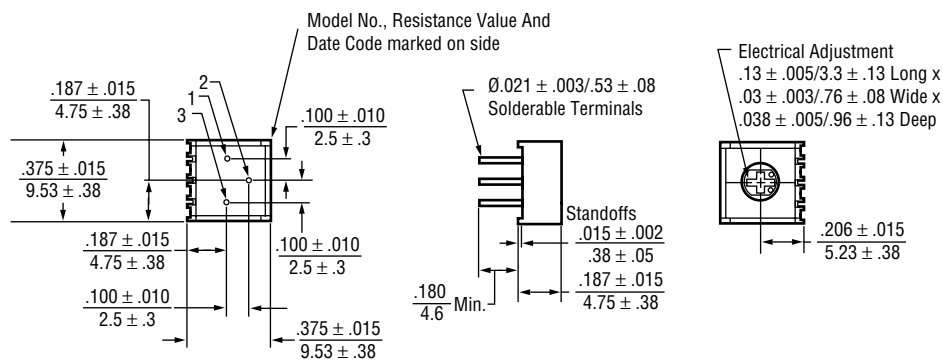


Note: Model 72P dimensions applicable to all other models except as noted.


Model 72PL

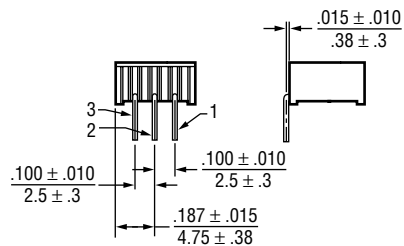

Model 72PM

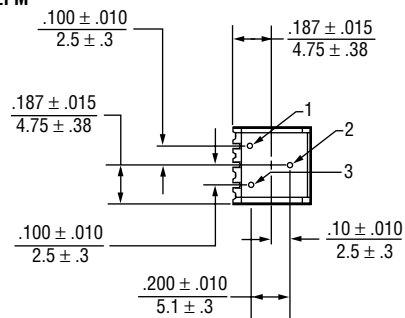


Model 72PX, 72RPX

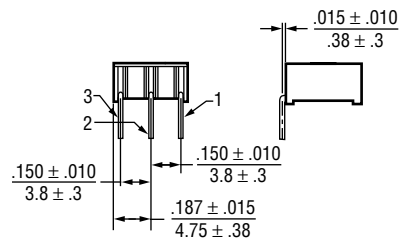


Model 72RPX - Terminals 1 and 3 are reversed

Model 72RP




Model 72X, 72RX

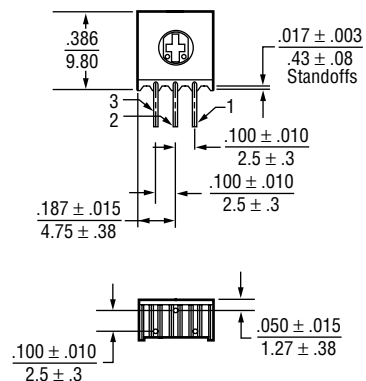


Model 72RX - Terminals 1 and 3 are reversed

Model 72XL, 72RXL, 72RW

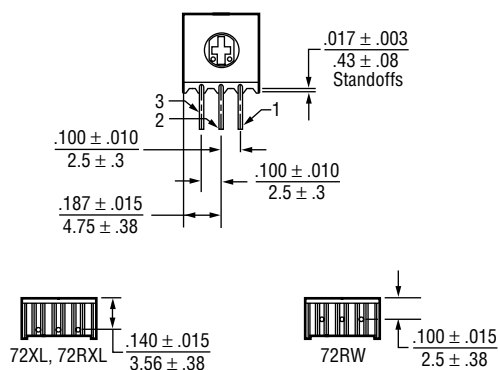

Model 72RXL And 72RW - Terminals 1 and 3 are reversed

Model 72XW, 72RXW




Model 72RXW - Terminals 1 and 3 are reversed

EXTENDED ROTOR OPTION (Inch/mm)

Available for all Model 72 pin styles:


72PE, 72PLE, 72PME, 72PXE, 72RPXE, 72XE, 72RXE,
72XLE, 72RXLE, 72RWE, 72XWE, 72RXWE

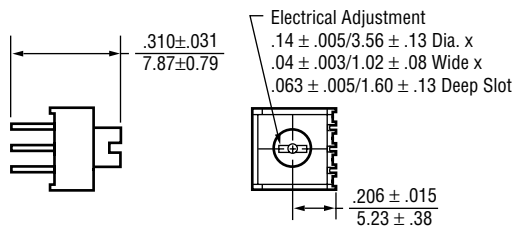**ADJUSTMENT KNOB OPTION (Inch/mm)**

Available options:

72XT- Side Adjustment (See 72X for Pin Configuration)

72PT- Top Adjustment (See 72P for Pin Configuration)

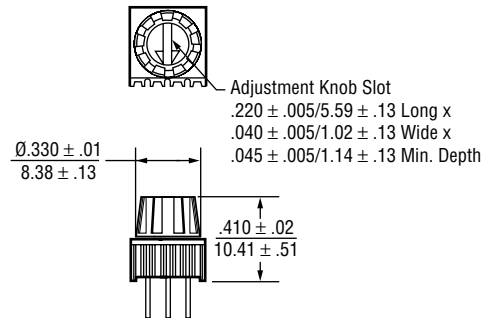

72PT Shown - Dimensions applicable to 72XT

STANDARD RESISTANCE VALUES, OHMS

10	100	1K	10K	50K	250K	2Meg
20	200	2K	20K	100K	500K	
50	500	5K	25K	200K	1Meg	

Standard: Boxes
Capacity = 100 Units

Option: Tubes
All units oriented with #1 pin to same side.

	Pin Style	P, PM	X, XL, XW, RW
Magazine	Width	= 0.47"	0.29"
	Height	= 0.54"	0.76"
	Length	= 20.5"	20.1"
	Capacity	= 50 Units	50 Units

Option: Tape & Reel, Ammo Pack (Available only for 72RW only)
All units oriented with #1 pin to the right of the direction of feed.

	Seat Plane to Centerline of Sprocket Hole	= .71" (18.03 mm)
Tape	Width	= 18 mm
	Sprocket	= Single Hole .50" spacing
	Capacity	= 1,000 Units
Reel	Diameter	= 14" (356mm)
Ammo	Tape Fold	= 12" (305mm)
	Box	= 1.8" x 13" x 10" (46mm x 330mm x 254mm)

ORDERING INFORMATION

Standard:

Model Series — **72** **P** **R** **10K** **LF**
 Pin Style —
 Resistance Value
 Resistance Prefix
 RoHS Compliant Product Code - Optional

Option:

Pin Style — **72** **W** **R** **10K** **LF** **TB**
 Packaging Option:
 TB = Tubes
 (Pin styles P, PM, X, XL, XW, RW)
 RoHS Compliant Product Code - Optional


Option:

Pin Style — **72** **RW** **F** **R** **10K** **LF** **TR**
 Pin Style Suffix:
 (Used with AP and TR packaging options.
 Applicable to pin style RW only.
 "F" designates 0.70" lead length.)
 Packaging Option:
 AP = Ammo pack
 TR = Tape & Reel
 (Pin style RW only)
 RoHS Compliant Product Code - Optional

Option:

Pin Style — **72** **X** **T** **R** **10K** **LF**
 Adjustment Options:
 T = Knob Option
 Applicable to pin style X & P only.
 E = Extended Rotor Option
 Applicable to all pin styles.
 RoHS Compliant Product Code - Optional


CIRCUIT DIAGRAM



NOTES

Metric equivalents, based on 1 inch = 25.4mm are rounded to the same number of significant figures as in the original English units and are provided for general information only.

Tolerances unless otherwise specified:
 Linear = $\pm .01$ inches (.25mm)
 Angular = ± 2 degrees



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

BI Technologies:

[72PXR1KLF](#) [72RXWR25KLF](#) [72XWR50](#) [72PLR100KLF](#) [72PLR1MEGLF](#) [72PLR20KLF](#) [72PR100KLFTB](#)
[72PR1KLFTB](#) [72PR200KLFTB](#) [72PR20KLFTB](#) [72PR500LFTB](#) [72PR50KLFTB](#) [72PTR1MEGLF](#) [72PTR250KLF](#)
[72PTR2KLF](#) [72PTR500LF](#) [72RPR1KLF](#) [72RPR1MEGLF](#) [72RPXR1MEGLF](#) [72RPXR20KLF](#) [72RPXR50KLF](#)
[72RWR10KLF](#) [72RWR5KLF](#) [72RXLR20KLF](#) [72RXLR5KLF](#) [72RXR100LF](#) [72RXR1MEGLF](#) [72RXR2KLF](#)
[72RXR5KLF](#) [72XLR100LF](#) [72XLR10KLF](#) [72XLR1KLF](#) [72XLR200KLFTB](#) [72XLR20KLF](#) [72XLR500LF](#) [72XLR5KLF](#)
[72XTR1MEGLF](#) [72XTR20KLF](#) [72XWR100LF](#) [72XWR100KLF](#) [72XWR10KLF](#) [72XWR1KLF](#) [72XWR20LF](#)
[72XWR200LF](#) [72XWR200KLF](#) [72XWR20KLF](#) [72XWR20LFTB](#) [72XWR25KLF](#) [72XWR50LF](#) [72XWR500LF](#)
[72XWR500KLF](#) [72XWR50KLF](#) [72XWR5KLF](#) [7221R1KL.25](#) [72XR250KLF](#) [72PR250KLF](#) [72XR50KLF](#) [72PMR2MLF](#)
[72PMR200KLF](#) [72PMR20KLF](#) [72PMR100LF](#) [72PMR20LF](#) [72PMR50LF](#) [72PR200LF](#) [72PMR200LF](#) [72PR1MLF](#)
[72XR200KLF](#) [72PR200KLF](#) [72PMR25KLF](#) [72PR25KLF](#) [72XR200LF](#) [72PR10LF](#) [72PMR250KLF](#) [72PMR500KLF](#)
[72XR500KLF](#) [72PR50LF](#) [72XR50LF](#) [72XR2MLF](#) [72XR1MLF](#) [72PMR10LF](#) [72PMR50KLF](#) [72PR2MLF](#) [72XR20LF](#)
[72PMR1MLF](#) [72XR100LF](#) [72XR25KLF](#) [72XR10LF](#) [72PR20LF](#) [72PM100LF](#) [72RXLER100KLF](#)

TT electronics:

[72RXR10KLF](#) [72PR200LFTB](#) [72XLR5KLFTB](#) [72XTR500KLF](#) [72PXR100KLF](#) [72PXR10KLF](#) [72PXR50LF](#)
[72XTR10LF](#) [72XTR2MEGLF](#) [72XWR1MEGLFTB](#) [72XWR2MEGLFTB](#) [72PXR100LF](#) [72XLR20LFTB](#) [72XLR25KLF](#)
[72XLR25KLFTB](#) [72XLR2MEGLF](#) [72XR200KLFTB](#) [72XR50KLFTB](#) [72XLR10LF](#) [72XLR100LFTB](#) [72XLR20KLFTB](#)
[72PTR2MEGLF](#) [72PTR50LF](#) [72PTR500KLF](#) [72PXR1MEGLF](#) [72PR10LFTB](#) [72PR5KLFTB](#) [72PTR100LF](#)
[72PTR50KLF](#) [72PTR5KLF](#) [72PXR10LF](#) [72XWR5KLFTB](#) [72PLR50KLF](#) [72PMR20KLFTB](#) [72PMR500KLFTB](#)
[72PMR500LFTB](#) [72PMR50LFTB](#) [72PR25KTB](#) [72XWR500LFTB](#) [72XWR50KLFTB](#) [72XWR50LFTB](#) [72XLR500KLFTB](#)
[72XLR50LFTB](#) [72XR10KLFTB](#) [72XR20KLFTB](#) [72XR250KLFTB](#) [72XR2KLFTB](#) [72XLR250KLFTB](#) [72XLR500KLF](#)
[72XWR10LF](#) [72XWR10LFTB](#) [72XWR1KLFTB](#) [72XWR250KLF](#) [72XWR2MEGLF](#) [72XTR1KLF](#) [72XTR200LF](#)
[72XTR200KLF](#) [72XTR25KLF](#) [72XTR2KLF](#) [72XTR5KLF](#) [72XR2MEGLF](#) [72XR500KLFTB](#) [72XR50LFTB](#)
[72XR5KLFTB](#) [72XTR50KLF](#) [72PXR20LF](#) [72PXR200KLF](#) [72PXR20KLF](#) [72PXR50KLF](#) [72PTR1KLF](#) [72PTR20LF](#)
[72PTR200LF](#) [72PXR500KLF](#) [72PXR5KLF](#) [72PMR5KLFTB](#) [72PR20LFTB](#) [72PR2KLFTB](#) [72PR2MEGLFTB](#)
[72PTR10LF](#) [72PTR100KLF](#) [72PMR100KLFTB](#) [72PMR10LFTB](#) [72PMR1KLFTB](#) [72PMR200KLFTB](#) [72PMR25KLFTB](#)
[72PMR2MEGLFTB](#) [72PLR20LF](#) [72PLR200LF](#) [72PLR25KLF](#) [72PLR50LF](#) [72PLR500KLF](#) [72PLR5KLF](#)
[72PLR100LF](#) [72PLR200KLF](#) [72PLR250KLF](#) [72PLR10LF](#) [72PLR10KLF](#) [72PLR1KLF](#) [72XWR100KLFTB](#)
[72XWR100LFTB](#)